

TECHNICAL SPECIFICATIONS

Electrical

	TS-MPPT-30	TS-MPPT-45	TS-MPPT-60
• Maximum Battery Current	30 amps	45 amps	60 amps
• Nominal Maximum Operating Power*			
12 Volt	400 Watts	600 Watts	800 Watts
24 Volt	800 Watts	1200 Watts	1600 Watts
48 Volt	1600 Watts	2400 Watts	3200 Watts

TS-MPPT-30, 45 and 60

- **Peak Efficiency** 99%
- **Nominal System Voltage** 12, 24, 36 or 48 volts DC
- **Maximum PV Open Circuit Voltage**** 150 volts DC
- **Battery Operating Voltage Range** 8-72 volts DC
- **Maximum Self-consumption** 2.7 Watts
- **Transient Surge Protection** 4500 Watts/port

Electronic Protections

- **Solar:** Overload, Short Circuit, High Voltage
- **Battery:** High Voltage
- **High Temperature**
- **Lightning and Transient Surges**
- **Reverse Current at Night**

Battery Charging

- **Charging algorithm** 4-stage
- **Charging stages** Bulk, Absorption, Float, Equalize
- **Temperature Compensation**
 - **Coefficient** -5mV/°C/cell (25° ref)
 - **Range** -30°C to +80°C
 - **Set Points** Absorption, Float, Equalize, HVD

Note: Remote Temperature Sensor is included.

Mechanical

- **Dimensions** 29.1 x 13.0 x 14.2 cm
11.4 x 5.1 x 5.6 in
- **Weight** 4.2 kg / 9.2 lbs
- **Max. Wire Size** 35 mm² / 2 AWG
- **Conduit knockouts** M20; ½, 1, 1 ¼ in
- **Enclosure** Type 1 (indoor and vented) IP20


*Input power can exceed Nominal Maximum Operating Power, but controller will limit and provide its rated continuous maximum output current into batteries. This will not harm the controller (reminder: do not exceed Voc).

**Exceeding Maximum PV Open Circuit Voltage may damage the controller.

WARRANTY: Five year warranty period. Contact Morningstar or your authorized distributor for complete terms.

Environmental

- **Ambient Temperature** -40°C to +45°C
- **Storage Temperature** -55°C to +100°C
- **Humidity** 100% non-condensing
- **Tropicalization** Epoxy encapsulation
Conformal coating
Marine rated terminals

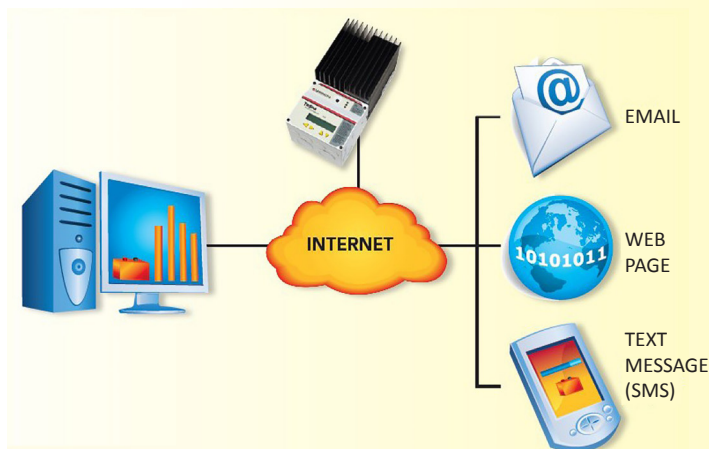

Communication Ports

	TS-MPPT-30	TS-MPPT-45	TS-MPPT-60
• MeterBus	Yes	Yes	Yes
• RS-232	Yes	Yes	Yes
• EIA-485	No	No	Yes
• Ethernet	No	No	Yes

Options

- **TriStar Meter-2 (TS-M-2)**
- **TriStar Remote Meter-2 (TS-RM-2)**
- **Meter Hub (HUB-1)**
- **Relay Driver (RD-1)**

Certifications

- **CE and RoHS Compliant**
- **ETL Listed (UL1741)**
- **cETL (CSA C22.2 No. 107.1-01)**
- **FCC Class B Part 15 Compliant**
- **U.S. National Electrical Code (NEC) 690.5 Compliant**
- **Manufactured in a certified ISO 9001 facility**



MORNINGSTAR

World's Leading Solar Controllers & Inverters

www.morningstarcorp.com

© 2014 MORNINGSTAR CORPORATION

PRINTED IN USA 03/15.EN